

GRIPPER WITH TWO PARALLEL JAWS SERIES P3K



Parallel double-acting two-jaw gripper, with either internal or external clamping. Also available in the double-acting with spring version, normally open (NO) for internal grip and normally closed (NC) for external grip.

Aluminum alloy body coated with surface hardening treatment; jaws made of wear-resistant coated steel.

The jaw-guiding system and precision in coupling with the body make the gripper extremely stable.

The ceramic-coated body reduces friction and wear, and enhances the movement of the jaws on the body.


All sizes are available in the version with standard stroke and clamping force, while only some in the version with reduced stroke but with higher clamping torque.

The gripper is equipped with a magnet and grooves for sensors.

A version designed to house inductive sensors is also available

(the inductive sensors are not supplied by Metal Work).

Pneumatic supply is available on both sides. There are different mounting options, including that with V-Lock interfacing plates on the bottom or on the side.

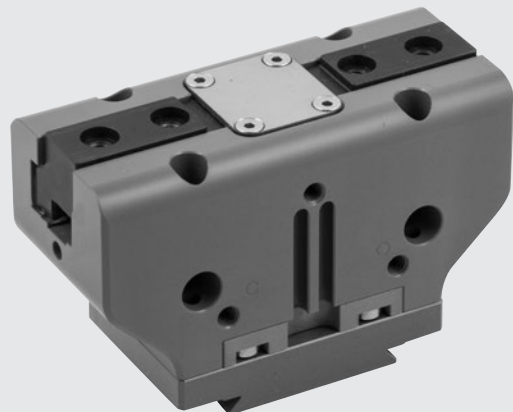


TECHNICAL DATA		P3K-64			P3K-80		P3K-100		
		DA	NO	NC	Standard DA	Increased force DA	Standard DA	Increased force DA	
Minimum operating pressure	bar		2			2		2	
	MPa		0.2			0.2		0.2	
	psi		29			29		29	
Maximum operating pressure	bar		8			8		8	
	MPa		0.8			0.8		0.8	
	psi		116			116		116	
Temperature range	°C	-10 to 80							
Fluid		20 µm filtered, lubricated or unlubricated air; lubrication if used, it must be continuous							
Gripping force at 6.3 bar *	opening	N	125	157	-	265	445	360	790
	closing	N	113	-	145	239	401	324	711
Minimum gripping force produced by the spring *		N	-	32	32	-	-	-	-
Maximum movable weight	kg		1.3			2.5	5	3.5	7
Stroke of each jaw	mm		6			8	4	10	5
Minimum time	opening	s	0.05	0.05	0.1		0.05		0.05
	closing	s	0.05	0.1	0.05		0.05		0.05
Repeatability	mm						0.01		
Moment of inertia as regards the piston axis	kg cm ²		1	1.9	1.9		4.5		12
Weight	kg		0.21	0.38	0.38		0.6		1

DA: Double-acting; NO: Double acting with spring, normally open; NC: Double acting with spring, normally closed.

* Referred to a single jaw 20 mm from the upper surface. The total force is obtained by multiplying the reported value by 2.


COMPONENTS

- ① BODY: hard-anodized aluminium
- ② JAWS: nitrided steel
- ③ PISTON ROD + GUIDE: nitrided steel
- ④ PISTON: hard-anodized aluminium
- ⑤ PISTON GASKET: NBR
- ⑥ PISTON ROD GASKET: NBR / polyurethane
- ⑦ BASE GASKET: reinforced SBR / NBR
- ⑧ MAGNET: neodymium

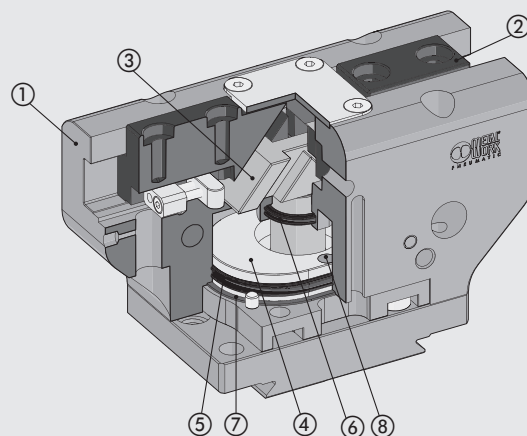


V-Lock MOUNTING OPTIONS

Standard




The gripper as supplied.

Lateral


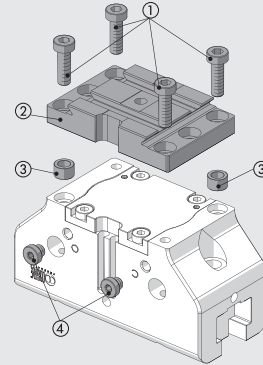


Unscrew the 4 screws ①, remove the plate ② and pull out the centring rings ③. Then unscrew the 2 plugs ④.


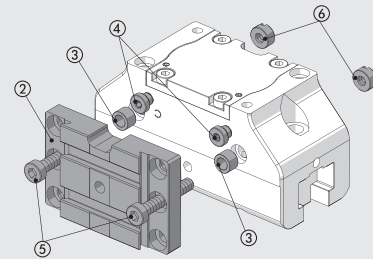


Replace the 2 plugs ④ on the opposite side of the gripper and insert the 2 centring rings ③. Position the plate ② and the two long screws ⑤ (supplied with the gripper). On the opposite side of the plate, insert the two nuts with a screwdriver slot ⑥ (supplied with the gripper) and tighten them against the screws ⑤.

GRIPPER P3K-64

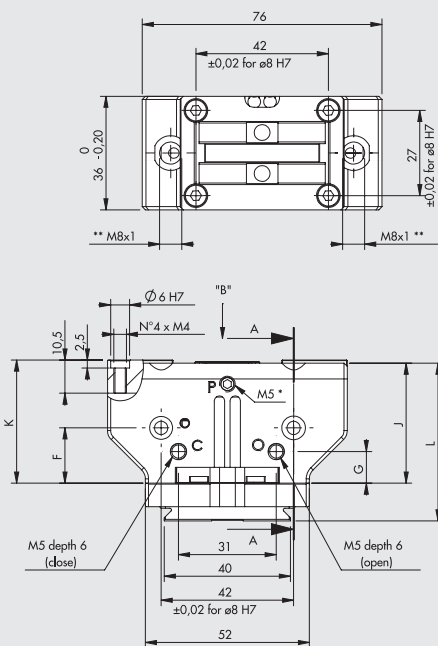

View from "B"



- Fa 1100 N
- Mx 60 Nm
- My 40 Nm
- Mz 40 Nm

F gripping force for each jaw
 Fa maximum admissible static axial force
 Mx, My, Mz maximum admissible static moments

	K	J	F ±0.02	G	L
DA	39	38	17.5	10	50
NO /NC	57	56	35.5	29	68

* Discharge pressurization connection, present on both sides


** Inductive sensor slot

NOTE: For standard dovetail dimensions, see chapter V-Lock adaptors.


GRAPHS OF GRIPPING FORCE AS A FUNCTION OF DISTANCE "L"

External grip*** (closing jaws)

Version DA

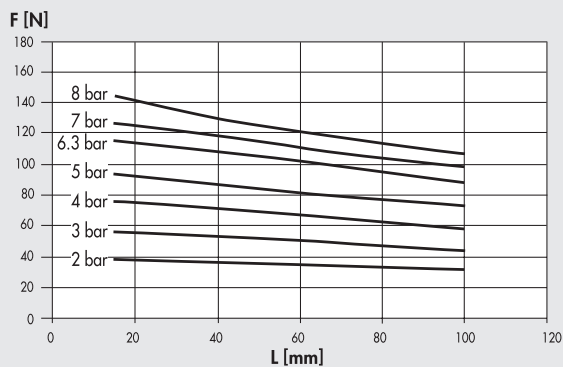


Version NC

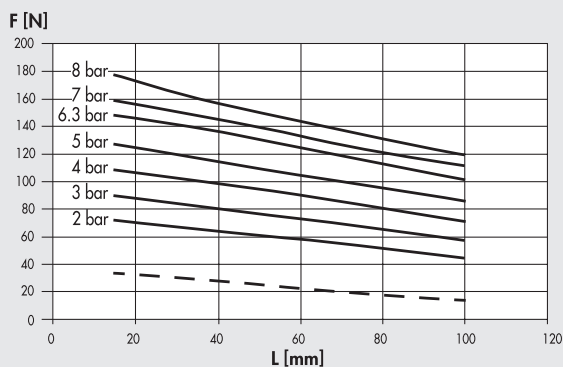


Internal grip*** (opening jaws)

Version DA

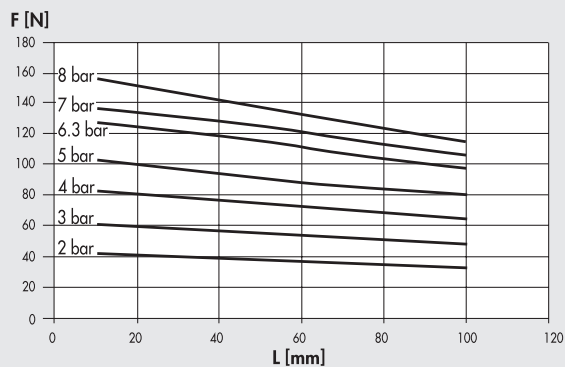

Version NO

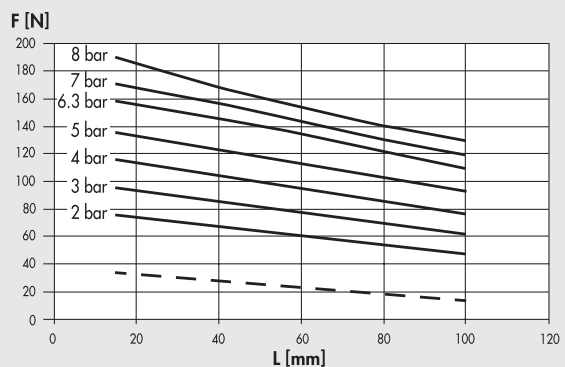


*** Referred to a single jaw. The total force is obtained by multiplying the value by 2.

— — — Minimum gripping force generated by the spring alone (NO and NC versions only). Actual force varies with stroke.


Code	Description
W1560640200K	Gripper with 2 parallel jaws P3K-64
W1560640201K	Gripper with 2 parallel jaws P3K-64 for inductive sensors
W1560642200K	Gripper with 2 parallel jaws P3K-64 NO
W1560642201K	Gripper with 2 parallel jaws P3K-64 NO for inductive sensors
W1560643200K	Gripper with 2 parallel jaws P3K-64 NC
W1560643201K	Gripper with 2 parallel jaws P3K-64 NC for inductive sensors

GRIPPER P3K-80

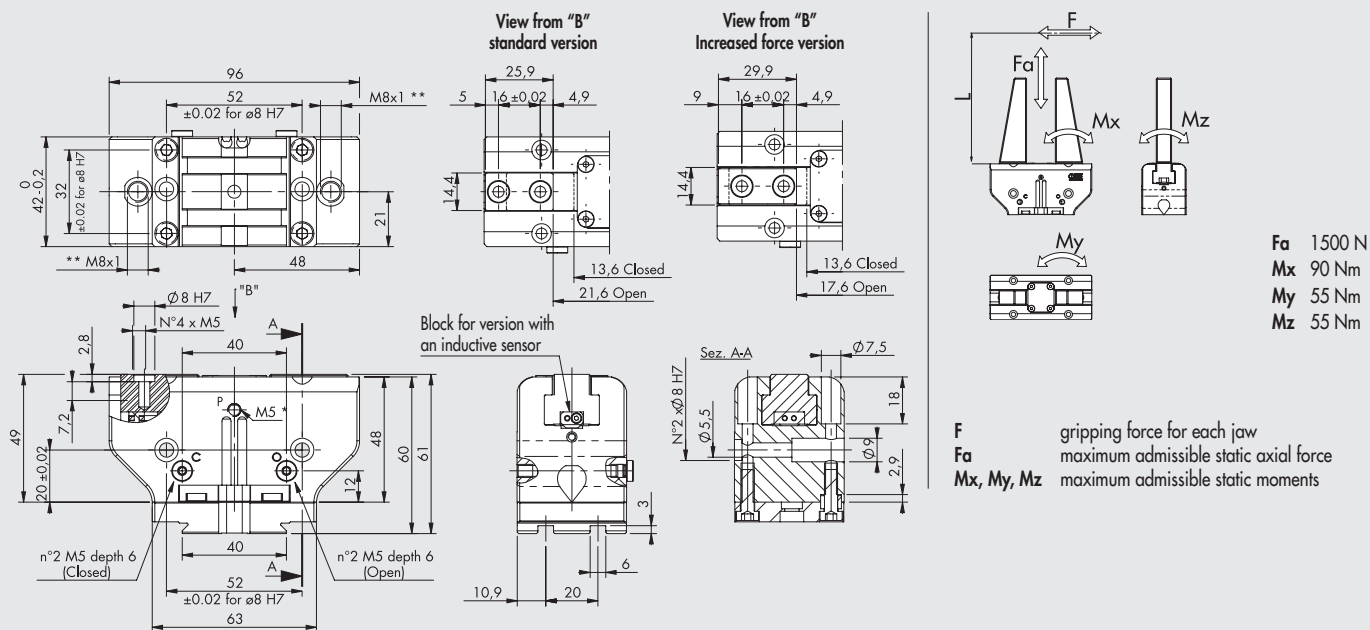


* Discharge pressurization connection, present on both sides
 ** Inductive sensor slot
 Note: For standard dovetail dimensions, see chapter V-Lock adaptors.

Standard version


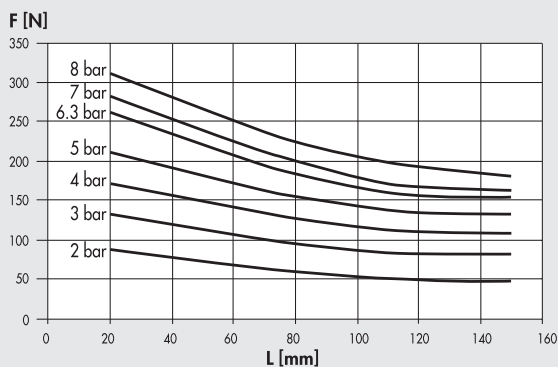


Increased force version

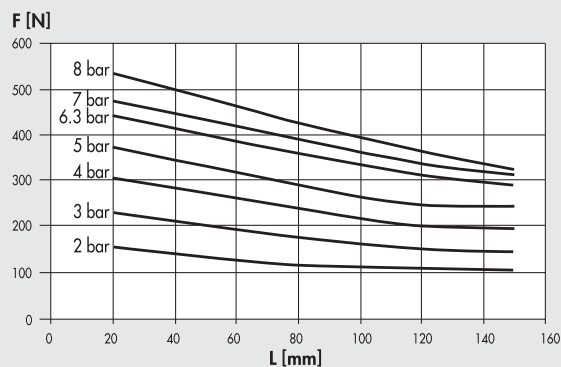

Code	Description
W1560800200K	Gripper with 2 parallel jaws P3K-80
W1560800201K	Gripper with 2 parallel jaws P3K-80 for inductive sensors
W1560800220K	Gripper with 2 parallel jaws P3K-80 increased force
W1560800221K	Gripper with 2 parallel jaws P3K-80 increased force for inductive sensors

GRIPPER P3K-100

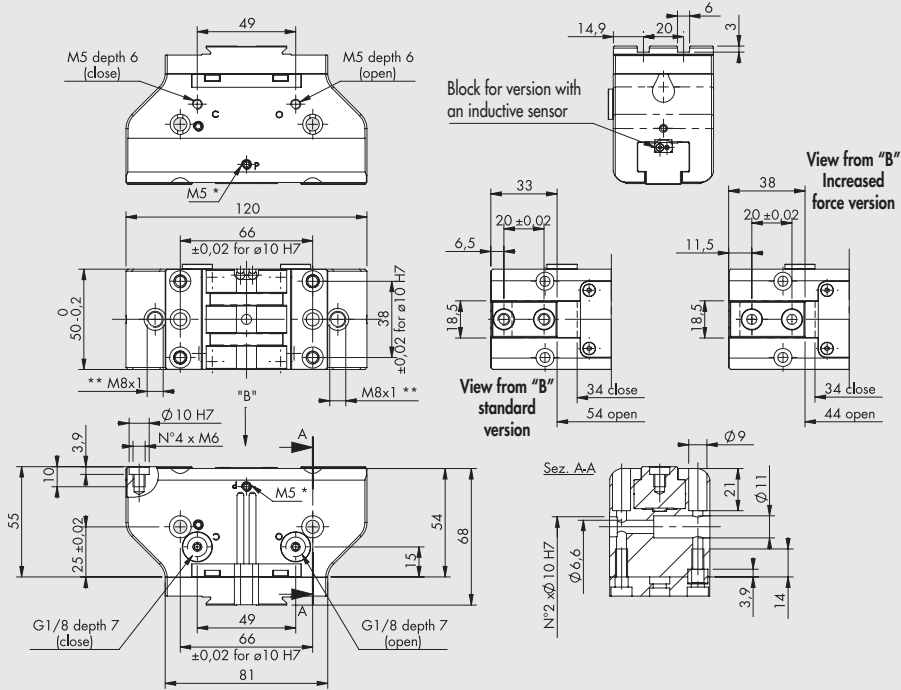


- Fa** 2000 N
- Mx** 115 Nm
- My** 70 Nm
- Mz** 80 Nm


F gripping force for each jaw
Fa maximum admissible static axial force
Mx, My, Mz maximum admissible static moments

* Discharge pressurization connection, present on both sides
 ** Inductive sensor slot
 NOTE: For standard dovetail dimensions, see chapter V-Lock adaptors.

Standard version

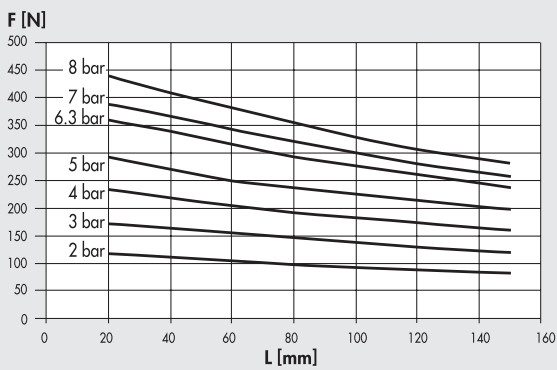


Increased force version

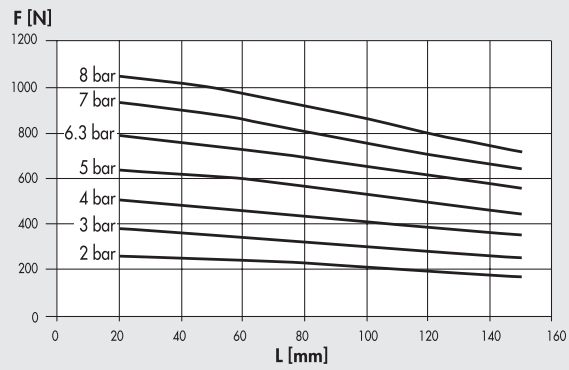

Code	Description
W1561000200K	Gripper with 2 parallel jaws P3K-100
W1561000201K	Gripper with 2 parallel jaws P3K-100 for inductive sensors
W1561000220K	Gripper with 2 parallel jaws P3K-100 increased force
W1561000221K	Gripper with 2 parallel jaws P3K-100 increased force for inductive sensors


ACCESSORIES

SENSOR Ø 4





For codes and technical data, see [chapter A6](#).

SENSOR MOUNTING IN THE NO AND NC GRIPPERS SLOTS

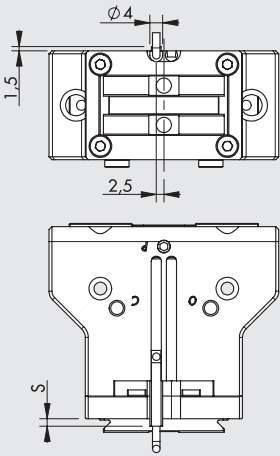

	S
	P3K-64
NO	12
NC	12

CENTRING RING

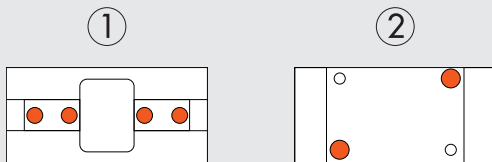

Code	ØA	ØB ¹⁷	C
W1560649201	4.5 ⁰ _{-0.1}	6	5 ⁰ _{-0.1}
W1560809201	5.1 ⁰ _{-0.1}	8	5 ⁰ _{-0.05}
W1561009201	6.2 ^{±0.1}	10	6.9 ⁰ _{-0.1}

Nota: n. 2 pezzi per confezione

QUANTITY OF KITS NEEDED

Sizer gripper	① - Use with jaws	② - Body use
64	2 code W1560649201	1 code W1560809201
80	2 code W156080920	1 code W1560809201
100	2 code W1561009201	1 code W1561009201

NOTES